
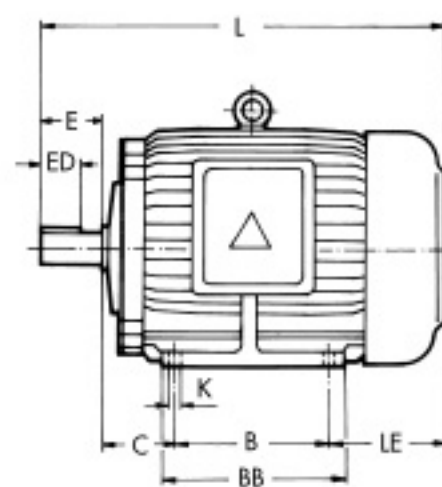
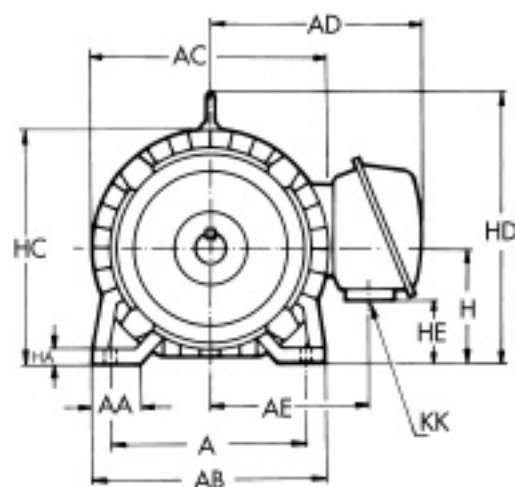


Type MAX - E2 Frame 71 - 200



Frame	Pole	DIMENSIONS															
		A	AA	AB	AC	AD	AE	B	BB	C	D	DB	E	ED	F	G	GA
71	2-6	112	36	140	162	145	107	90	115	45	14	M5	30	14	5	11	16
80	2-6	125	36	155	177	178	129	100	130	50	19	M6	40	25	6	15.5	21.5
90S	2-6	140	36	170	200	189	140	100	130	56	24	M8	50	32	8	20	27
90L	2-6	140	36	170	200	189	140	125	150	56	24	M8	50	32	8	20	27
100L	2-6	160	45	195	219	199	150	140	175	63	28	M10	60	40	8	24	31
112M	2-6	190	45	224	238	208	159	140	175	70	28	M10	60	40	8	24	31
132S	2,4	216	45	250	273	244	184	140	175	89	38	M12	80	56	10	33	41
132M	4,6	216	45	250	273	244	184	178	212	89	38	M12	80	56	10	33	41
160M	2-6	254	50	300	334	282	222	210	250	108	42	M16	110	80	12	37	45
160L	2-6	254	50	300	334	282	222	254	300	108	42	M16	110	80	12	37	45
180M	2,4	279	75	355	382	307	247	241	297	121	48	M16	110	80	14	42.5	51.5
180L	4,6	279	75	355	382	307	247	279	335	121	48	M16	110	80	14	42.5	51.5
200L	2-6	318	80	400	420	372	285	305	365	133	55	M20	110	80	16	49	59

Frame	Pole	DIMENSIONS									BEARINGS	
		H	HA	HC	HD	HE	K	KK	L	LE	Drive End	Non-Drive End
71	2-6	71	8	152	-	26	7	M20 x 1.5	251	86	6202ZZ	6202ZZ
80	2-6	80	9	168	-	13	10	M25 x 1.5	283	93	6204ZZ	6204ZZ
90S	2-6	90	10	190	-	23	10	M25 x 1.5	308	102	6205ZZ	6205ZZ
90L	2-6	90	10	190	-	23	10	M25 x 1.5	333	102	6205ZZ	6205ZZ
100L	2-6	100	12.5	-	243	33	12	M25 x 1.5	375	112	6206ZZ	6305ZZ
112M	2-6	112	14	-	265	45	12	M25 x 1.5	392	122	6306ZZ	6306ZZ
132S	2,4	132	16	-	310	58	12	M40 x 1.5	454	145	6308ZZ	6306ZZ
132M	4,6	132	16	-	310	58	12	M40 x 1.5	492	145	6308ZZ	6306ZZ
160M	2-6	160	18	-	377	83	15	M40 x 1.5	608	180	6309ZZ	6307ZZ
160L	2-6	160	18	-	377	83	15	M40 x 1.5	652	180	6309ZZ	6307ZZ
180M	2,4	180	20	-	421	103	15	M40 x 1.5	672	200	(6211C3) 6311ZZ	(6211C3) 6310ZZ
180L	4,6	180	20	-	421	103	15	M40 x 1.5	710	200	6311ZZ	6310ZZ
200L	2-6	200	25	-	469	88	19	M50 x 1.5	770	222	(6312C3) 6312	(6312C3) 6212

Dimension KK = Metric conduit.
 Terminal box = Rotatable 4 x 90° increments.
 Bearings = Grease pre-packed, double shields except frame 180M - 2 & 200L 2 - 6 which have grease relief system (Bearing numbers in brackets are for 2 pole motors).

Tolerances: $\frac{D(14-28)}{j6}$ $\frac{D(38-48)}{k6}$ $\frac{D55}{m6}$ $\frac{H}{+0/-0.5}$